



ENVIROHEAT — ENERGY EFFICIENT HOT WATER HEATER

5 YEAR
REPLACEMENT
WARRANTY

If your tank or
mechanical components
fail within 5 years,
we will replace it with a
BRAND NEW UNIT.*

*Conditions apply, please consult the

Enviroheat warranty policy.

The ENVIROHEAT energy efficient hot water heaters use heat pump technology, a leap forward in energy efficiency and is now available in Australia. Produced by the world's largest appliance manufacturer, the system was initially introduced into Europe over a decade ago and has proven performance in temperatures as low as -7°C.

It offers the best performance of any system in its class with up to a massive 71% saving in energy when compared to a conventional water heater. The ENVIROHEAT system has undergone rigorous testing and has been certified by the Australian Government Clean Energy Regulator. ENVIROHEAT's inclusion to the CER Register allows you to claim generous government rebates and dramatically reduces your investment.

The ENVIROHEAT HP series has an advanced control system that is feature packed and above all, easy to use. It can be programmed to maximize the use of roof top solar power systems whilst not compromising a plentiful supply of steaming hot water when you need it. The automatic sanitization feature ensures that your family is safe from legionella and other water borne bacteria.

The combination of whisper quiet operation, smart controls, superior UV protection and generous government rebates makes ENVIROHEAT the natural choice for an energy efficient home.





STC REBATE ZONES

The Clean Energy Regulator has calculated the energy saving of the ENVIROHEAT systems according to where you live. Use the map shown here to determine how much you can save on an ENVIROHEAT system. To confirm your eligibility, check your postcode at www.cleanenergyregulator.gov.au.

Some States provide additional rebates and incentives that compliment the STC's program. Your local Enviroheat representative can advise you on any additional incentives in your area.

Model	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
Enviroheat 200EH1-14	24	23	29	31	30
Enviroheat 250EH1-15	25	23	29	31	30

Current as at 2019 and is subject to change based on prevailing Government legislation.



To increase the adoption of more environmentally friendly, energy efficient hot water systems, the Australian Government has implemented the Small-scale Renewable Energy Scheme (SRES) which is sometimes referred to as "The Solar Rebate Program".

3

If you install a hot water system that has gone through the rigorous Government certification process, you will receive an electronic form of currency called "Small-scale Technology Certificates" (STCs).

You can take advantage of your STCs by assigning them to the provider of your new hot water system and in doing so, you will receive an immediate point of sale discount on your purchase. Not only will you enjoy the energy cost savings of your new system, your investment will be significantly reduced.




Heat Pump Model	200EH1-14	250EH1-15	
Nominal tank volume (L)	200	250	
Power supply (V/Hz/Phase)	220-40/50/1		
Insulation protection	IPX4		
Relief valve pressure (kPa)	700		
Tank material	Vitreous enamel coated steel		
Plumbing connection size	G3/4" F		
Corrosion protection	Sacrificial anode		
Average heat pump input power (W)	495		
Max. heat pump input power (W)	865		
Auxiliary heating input power (W)	1500		
Max. input power/current (W/A)	2365/9.85		
Refrigerant (type/quantity)	R134a/0.9kg		
Default temp. setting (°C)	55		
Temperature setting range (°C)	35-75		
Minimum ambient temperature (°C)	-7		
Noise level (dBA)	46		
Unit weight (net/gross - kg)	91/103	102/115	
Product dimensions (D*W*H mm)	600*629*1670	600*629*1965	
Packing dimensions (D*W*H mm)	735*695*1940	735*695*2250	

•	All pictures	shown	are fo	r illustra	ation p	ourpose	only.
---	--------------	-------	--------	------------	---------	---------	-------

- · Products and specifications are subject to change without notice.
- The system must be installed in accordance with the installation instructions provided in the users manual.
- If the system is to be installed in an unsheltered location, it must be fitted with an Enviroheat Weathershield (supplied with unit).

Model	A	В	С	D
200EH1-14	629	270	980	1692
250EH1-15	629	270	1275	1987

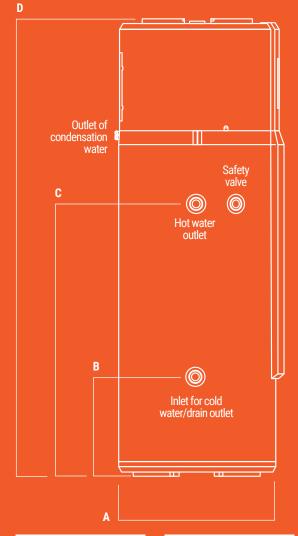





Available from:



460 Victoria Road MALAGA WA 6090A division of Energie Group Australia Ptv. Ltd. ABN 50 166 500 787

Phone (08) 9203 2000

Sales 1300 314 173

Service **1300 825 143**

Email sales@ega.energy

Online energiegroup.com.au